

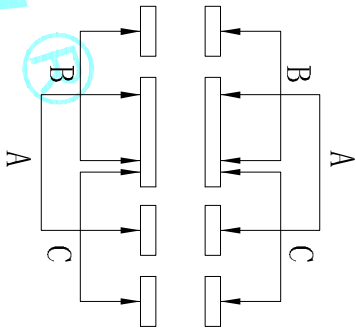
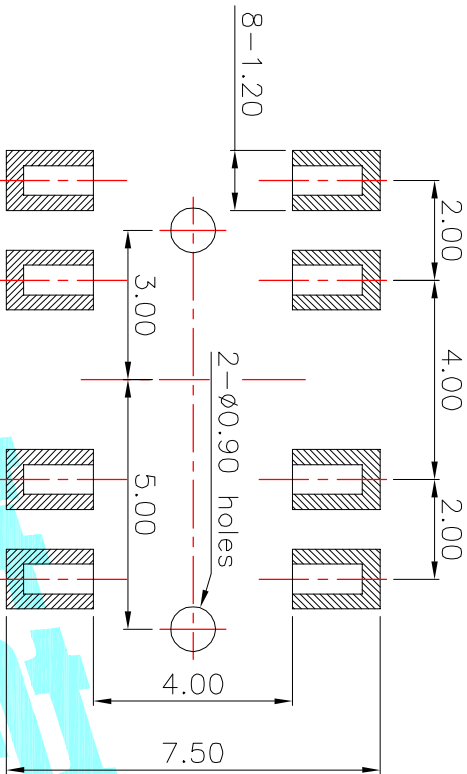
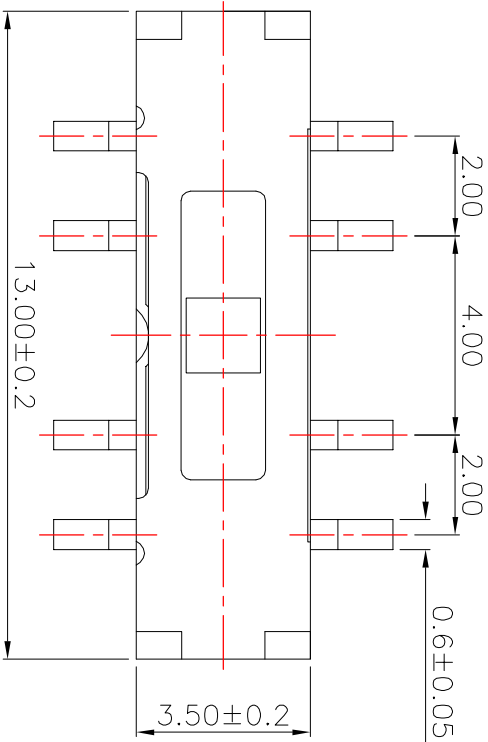


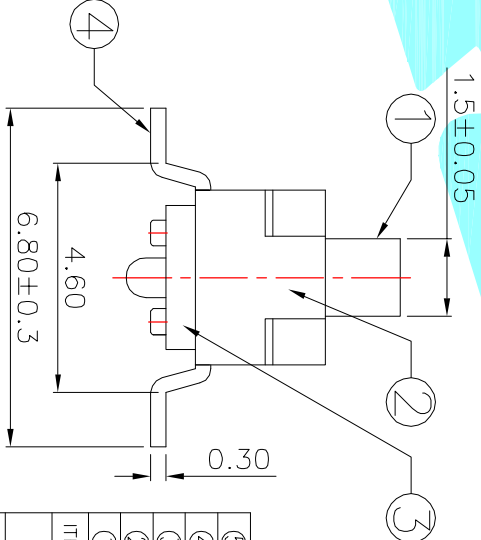

Circuit Diagram

PCB Layout(Pattern side)

Typical Specifications :
1. Rating : DC 6V 0.3A
2. Life:10,000 Cycles Min.

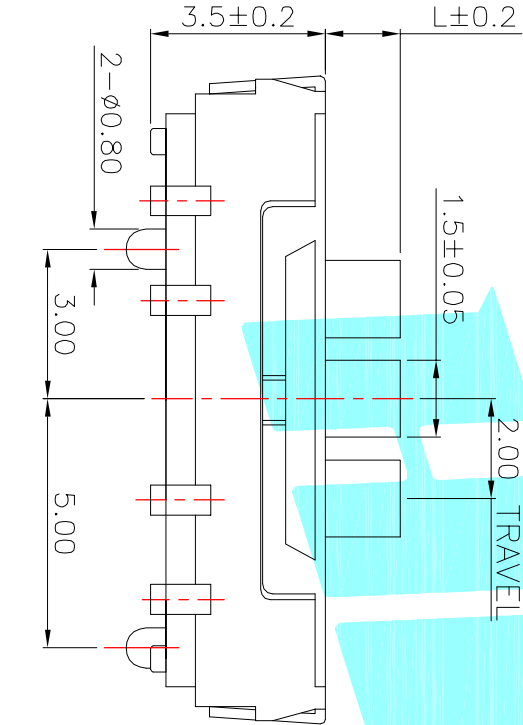

PART NO.	L	Operating force
K3-2336S-F1	2	250±100gf
K3-2336S-K1	3	
K3-2336S-L1	4	

⑤	Contact Spring	—	2	Beryllium copper	Ag Plated	—
④	Terminal	—	8	Brass Strip	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	SUS	Natural	—
①	KNOB	—	1	NYLON	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	HROELECTRONICS CO.,LTD	
DRAWN J.X.Zhang	2013/9/26	ELECTRONICS CO.,LTD	

						CHECKED				TITLE:		TOGGLE SWITCHES	
						APPROVALS				PART NO.			
						TOLERANCES ARE		30~12.7 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
											DRAWING NO.		SHEET 1 of 1
										</			