


PCB Layout (Pattern Side)

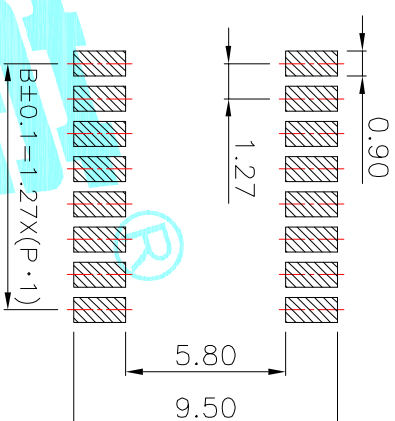

NOTE:

1. Rating: 24V 25mA DC
2. Insulation Resistance: $\geq 100 \text{ M}\Omega$
3. Withstand voltage: AC 500V 1Minute
4. Operating Force Range: 800gf Max
5. Mechanical Life: 3,000 Cycles
6. Operating Temperature range: $-20^{\circ}\sim +70^{\circ}\text{C}$
7. Ambient Humidity used: $\leq 85\% \text{RH}$

Position(位数)	2P	4P	6P	8P	10P
DIM.A(长度)	4.07	6.61	9.15	11.69	14.23
DIM.B(长度)	1.27	3.81	6.35	8.89	11.43
PART NO. 型号/颜色(K)	EP-02KS	EP-04KS	EP-06KS	EP-08KS	EP-10KS

⑤	Contact Spring	—	Phosphor bronze	Au Plating	—	
④	Terminal	—	Phosphor bronze	Au Plating	—	
③	Base	—	PBT	Black	—	
②	Cover	—	PBT	Black	—	
①	Keystroke	—	PBT	White	—	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		—		
DRAWN		J.X.Zhang		2014/08/20		

OKHRO
ELECTRONICS CO.,LTD

CHECKED: _____ TITLE: MULTIFUNCTIONAL SWITCHES

APPROVALS: _____ PART NO.: EP-□□□□

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
TOLERANCES ARE: 30~100μ ±0.30 ANGLE UNIT: mm SCALE: 1:1 PROJ: PROJ. SHEET 1 OF 1						