



ON 初始位置 (横方向)  
动作力测量基准位置

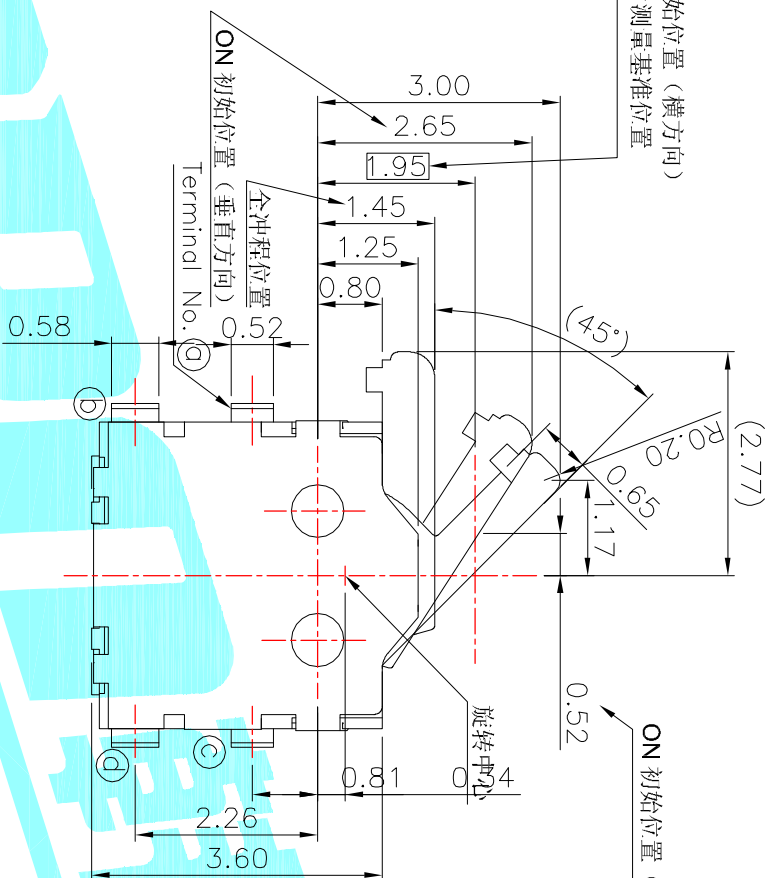


ON 初始位置 (横方向)

PCB Layout (Pattern side)

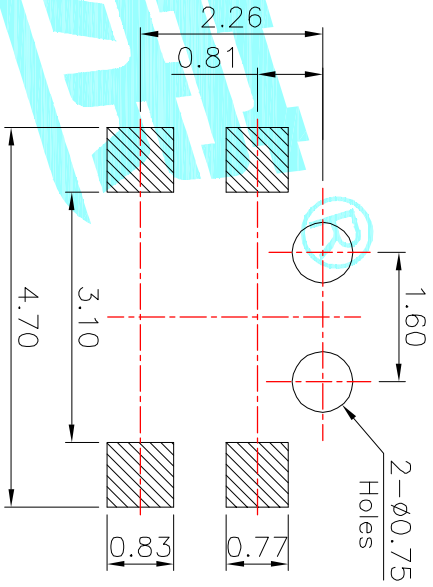

NOTE:  
Rating: DC 12V 50mA  
Operating Force: 20±10gf  
Lifetime: 100,000 Cycles

PART NO.	K5-1619UA-02
	K5-1619UN-02

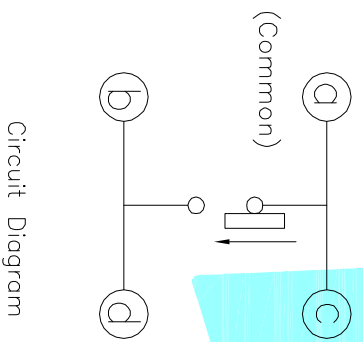

Circuit Diagram

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	
④	Terminal	—	4	Phosphor Bronze	Ag Plated	
③	Base	—	1	PA46	Black	
②	Cover	—	1	SUS	Natural	
①	Slider	—	1	PA46	Black	

APPROVALS		DATE	TITLE:	
DRAWN	J.X.Zhang	2013/8/29	DETECTOR SWITCHS	
CHECKED			PART NO.	
APPROVALS			SCALE: 1:1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:
	A		NEW				30~12.5 ±0.30	±2°	mm	1:1	①
							10~30 ±0.20				②
							5~10 ±0.15				③
							~5 ±0.10				④